



HotPot™

*Shielded Dry Heating Block
Ideal for Tc-99m Kit Preparation*

FEATURES

- Eliminates splashes from boiling water
- Digital temperature control
- Count down timer with automatic shut off
- 4 mm lead shielding on all sides
- Heater range up to 160 °C
- Durable powder coated steel housing
- Protective Teflon cover overheating element
- Four heating cavities to accommodate most common kit vials

SPECIFICATIONS

- Temperature Setting Range: 5 °C - 160 °C (41 °F - 320 °F)
- Resolution: 1 °C (33.8 °F)
- Accuracy: +%5
- Operating Temperature: 5 °C - 40 °C (41 °F - 104 °F)
- Storage Temperature: 0 °C - 50 °C (0 °F - 122 °F)
- Power: 120 V/60 Hz or 220-240 V/50 Hz
- Weight: 6.5 kg (14.3 lb)

PHYSICAL

- 209 x 140 x 129 mm (8.2 x 5.5 x 5.1 in.)
- Shielding: 4 mm (.16 in.) lead

Kit and Vial Well Dimensions:

220V V version


- Hole 1: 21 mm diameter x 49.5 mm deep (.83 x 1.95 in.)
- Hole 2: 24 mm diameter x 41.5 mm deep (.94 x 1.63 in.)
- Hole 3: 22.5 mm diameter x 45.5 mm deep (.89 x 1.79 in.)
- Hole 4: 26 mm diameter x 45.5 mm deep (1.02 x 1.79 in.)

110V V version

- Hole 1: 25.5 mm diameter x 43 mm deep (1 x 1.7 in.)
- Hole 2: 22.6 mm diameter x 41 mm deep (.9 x 1.6 in.)
- Hole 3: 24.2 mm diameter x 27 mm deep (.95 x 1.1 in.)
- Hole 4: 24.2 mm diameter x 27 mm deep (.95 x 1.1 in.)

ORDERING INFORMATION

- Item #0651-0023 (220 V)
- Item #0651-0024 (110 V)

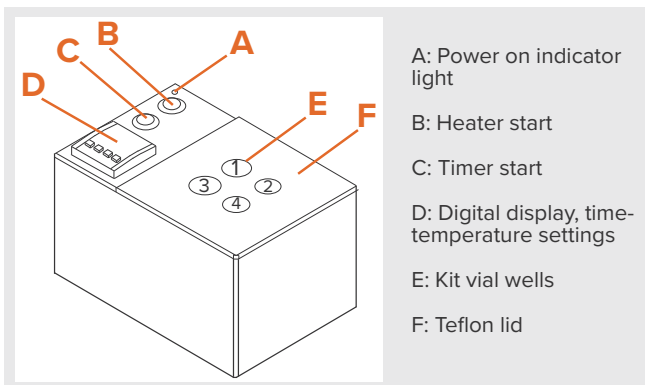

A: Power on indicator light

B: Heater start

C: Timer start

D: Digital display, time-temperature settings

E: Kit vial wells

F: Teflon lid

