



HIGH TEMPERATURE CAMERA

M215 S™

Spyrometer® 4 Dual Imaging IR Pyrometer Processor



We believe in operating combustion processes as simply and efficiently as possible through effective instrumentation, to ensure the best use of resources. Our M215 S Spyrometer processor supports single or multi-camera installations with the straightforward clarity necessary to make critical decisions without having to interrogate the system. Whether utilizing the processor for direct operator feedback, or incorporating the output information into your plant control system, the Spyrometer system supports efficient use of your critical resources. The package provides up to 32 overlaid temperature measurement zones per camera, with the ability to lock a zone that directly drives your plant system, while still allowing other zones to be utilized for temporary setup and monitoring. All temperature measurement zones can be fully adjustable for size and measurement method through the user interface and can be locked once set up. Mirion's unique combination of simultaneous multi-spectral infrared temperature measurements overlaid on a visible image provides the greatest level of feedback and performance of your applications in a single view.

FEATURES

- ✓ Continuous, clear real-time video
- ✓ Intuitive graphical user interface
- ✓ Temperature signaling over a number of different protocols (i.e. Ethernet, ModBus, OPC) available
- ✓ 32 moveable and sizeable temperature measurement zones (TMZ). Programmable for minimum, maximum or average temperature measurement
- ✓ 16 channels 4-20 mA output with flexible TMZ assignment and channel-by-channel calibration
- ✓ On-screen trending with flexible TMZ assignment
- ✓ Customizable presentation with instrumentation quality viewing
- ✓ Two Spyrometers connect to one processor
- ✓ Remote control of Spyrometer settings
- ✓ Simplified cable connection between cameras and processor


M215 S SPYROMETER 4 DUAL IMAGING IR PYROMETER PROCESSOR

BENEFITS

- ✓ Integrated video processing/temperature measurement package with true multi-spectral infrared analysis
- ✓ Dual Spyrometer support in a 2U form factor provides for lower hardware costs and control room space requirements
- ✓ Full compatibility with M550 Series Spyrometers
- ✓ Embedded Microsoft operating system
- ✓ Intuitive graphical user interface

SPECIFICATIONS AND PERFORMANCE

- Power: 100 - 240 V ac; 50/60 Hz
- Power Consumption: 400 W max
- Dimensions: 88.9 x 482.6 x 450.9 mm (H x W x D) (excludes mounting lugs/handles)
- Installation Clearances: 76 mm (3.0 in.) at rear
- Operating Temperature: 0 - 50 °C (32 - 122 °F)
- Storage Temperature: 0 - 60 °C (32 - 140 °F)
- Relative Humidity: 0 - 80% non condensing
- Video Signal Input: 2 x composite video with multiplexed pyrometer data, compatible with M550 Series Spyrometer
- Interface Output Options: Ethernet, OPC, ModBus, DCS
- Maximum Altitude: 2000 m (6561 ft)
- Video Output Channels: 4 x HDMI or 1 x DVID (to PC monitor)
Maximum resolution: DVI-D 2560 x 1600, HDMI 4K 3840 x 2160
- Analog Outputs: 4 - 20 mA; 16 programmable channels
- Compatibility: M550 Series Spyrometer
- Ancillary Peripherals: 1 mouse; 1 standard keyboard
- Additional Interfaces: 2 network ports; 4 USB ports
- Weight: 11 kg (24.2 lb)
- Hardware: Supplied with 19 in. rack mounts, handles and feet for desktop mount

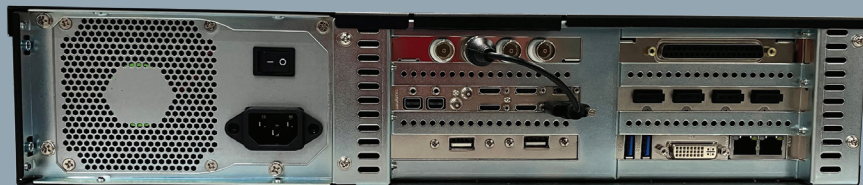

MIRION
TECHNOLOGIES

Copyright © 2025 Mirion Technologies, Inc. or its affiliates. All rights reserved. Mirion, the Mirion logo, and other trade names of Mirion products listed herein are registered trademarks or trademarks of Mirion Technologies, Inc. or its affiliates in the United States and other countries. Third party trademarks mentioned are the property of their respective owners.