




RAMSYS™

NGM 216S™

Low Range Beta Noble Gas Monitor

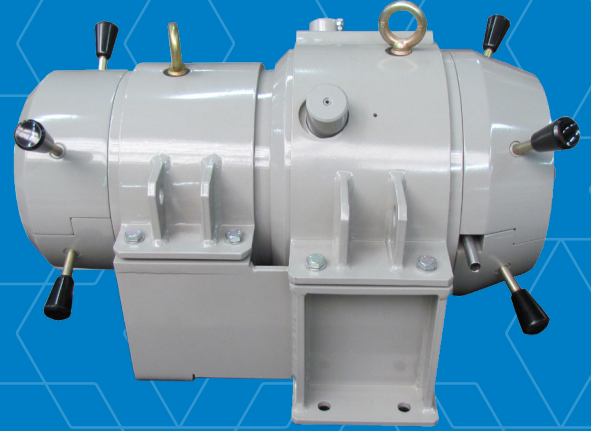

Continuously measuring beta volumetric activity of radioactive gaseous sample.

DESCRIPTION

The NGM 216S monitor from the RAMSYS product line has been developed to continuously measure beta volumetric activity of radioactive gaseous sample.

The sample is drawn from discharge stacks, reactor building, ventilation ducts or working areas via a pumping system. This monitor can operate as a stand alone device or in conjunction with a particulate monitor (PM 205 or ABPM 201), an iodine monitor (IM 201) or a shielded particulate and iodine sampler (PIS 203) and with a high range noble gas monitor (NGM 203) to form a very wide range monitoring system.

FEATURES

- ✓ Compact and reliable
- ✓ Calculation of the total released activity through a stack flow rate signal provided
- ✓ 1E qualification and embedded safety related software
- ✓ Available under 10 CFR 50 App. B, IEC 61226 and ASME NQA-1 programs for safety related application

NGM 216S™ LOW RANGE BETA NOBLE GAS MONITOR

PHYSICAL CHARACTERISTICS

- Radiation detected: beta
- Detector: 2" thin plastic beta scintillator + PMT + embedded LED (SB 70)
- Lead shield: 4 π/7.5 cm (4 π/3 in)
- Typical energy range: > 30 keV
- Typical measurement range: 3.7 10⁺³ to 3.7 10⁺⁹ Bq/m³ (10⁻⁷ to 10⁻¹ μCi/cc)

ENVIRONMENTAL CHARACTERISTICS

- Normal temperature: +5 °C to +40 °C (+41 °F to +104 °F)
- Temperature limit:
 - Processing unit: -5 °C to +55 °C (+23 °F to +131 °F)
 - Detector: +0 °C to +60 °C (+32 °F to +140 °F)
- MTBF:
 - Processing unit: > 50 000 hours
 - Detector: > 20 000 hours, with preventive maintenance
- TID: 100 Gy (10⁺⁴ rad)
- Protection index: IP65 and IK07

PNEUMATIC CHARACTERISTICS

- Standard flow rate: 28.3 l/min (1 scfm)
- Pressure drop: 50 mbar (0.73 psi)

MECHANICAL CHARACTERISTICS

- Dimensions:
 - Processing unit: 390 mm x 196 mm x 187 mm (15.3 in x 7.7 in x 7.3 in)
 - Detector: 250 mm (10 in) x Ø 72 mm (2.8 in)
- Weight:
 - Processing unit: 4.5 kg or 7 kg (10 lb or 15.5 lb)
 - Detector: ~ 300 kg (661 lb)
- Color: gray RAL 7030 (decontaminable paint)
- Inlet tube connection: Ø 12 mm OD (1/2 in)
- Outlet tube connection: Ø 12 mm OD (1/2 in)

ELECTRICAL CHARACTERISTICS

- Power supply: 230 Vac – 50 Hz or 120 Vac – 60 Hz
- Data link outputs: one RS232 and two isolated RS485
- Alarm relays: three SPDT relays
- I/O: two isolated analog outputs (0/4-20 mA)
- Embedded LED tester

SIGNALING (Applicable to LPDU only)

- Alphanumeric display: measurement, status...
- Sound alarm: buzzer 90 dBA at 1 meter
- Visual alarm: three lights (red, yellow, green)

REFERENCE STANDARDS

- Nuclear: IEC 60761-1 and IEC 60761-3
- Environmental: IEC/IEEE 60780-323
- Seismic: IEC 60980, IEEE 344
- EMC: 2014/30/EU and 2014/35/EU, EPRI 102323,
- MIL STD 461, IEC 61000-6-2 and IEC 61000-6-4

VERSIONS

- 230 Vac or 120 Vac
- Local processing and display unit (LPDU) or local processing unit (LPU)
- With or without check source
- With or without heater
- PIS sampler
- Dust filter holder

ACCESSORIES

- Calibration tools
- Software: MASS2™, RAMVISION™, SIMS2™ applications...
- USB converters
- Ethernet (LPDU version only)



MIRION
TECHNOLOGIES

Copyright © 2024 Mirion Technologies, Inc. or its affiliates. All rights reserved. Mirion, the Mirion logo, and other trade names of Mirion products listed herein are registered trademarks or trademarks of Mirion Technologies, Inc. or its affiliates in the United States and other countries. Third party trademarks mentioned are the property of their respective owners.