



RAMSYS™

PIM 206S™

Seismic Particulate and Iodine Monitor


Continuously measuring particulate and iodine volumetric activities in stacks, ventilation ducts or working areas. Can withstand seismic conditions.

DESCRIPTION

The PIM 206S monitor forms part of the RAMSYS product line.

It has been developed to continuously measure the particulate and iodine volumetric activities in stacks, ventilation ducts or working areas.

It integrates all the functions and performances of the ABPM 201 and IM 201 monitors into a single monitor.

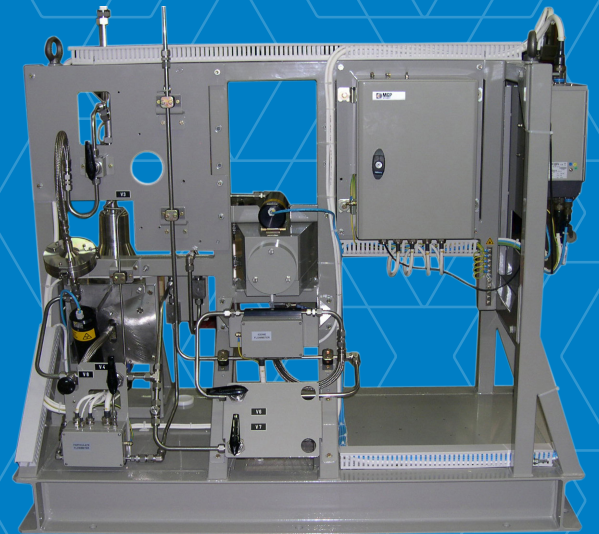

FEATURES

- ✓ Particulate monitoring with static and dynamic compensation of the radon and thoron solid progenies
- ✓ Iodine monitoring for both molecular and organic forms
- ✓ 1E qualification and embedded safety related software
- ✓ Available under 10 CFR 50 App.B, ASME NQA-1 and IEC 61226 programs for safety related applications

PIM 206S™ SEISMIC PARTICULATE AND IODINE MONITOR

PHYSICAL CHARACTERISTICS

Particulate (ABPM 201):

- Radiation detected: alpha, beta and gamma
- Detector: dual large area silicon (PIPS® detector)
- Filter type: FSLW
- Typical energy windows:
 - Alpha: 2 MeV to 10 MeV
 - Beta: 80 keV to 2.5 MeV
 - Gamma: 80 keV to 2.5 MeV
- Typical measurement range:
 - Alpha: 10^{-2} to $3.7 \cdot 10^{+6}$ Bq/m³ ($2.7 \cdot 10^{-13}$ to 10^{-4} µCi/cc)
 - Beta: 1 to $3.7 \cdot 10^{+6}$ Bq/m³ ($2.7 \cdot 10^{-11}$ to 10^{-4} µCi/cc)

Iodine (IM 201):

- Radiation detected: gamma
- Detector: 1¼"x1" NaI(Tl) scintillator + PMT (SG/NAI 1¼"x1")
- Iodine cartridge: 57.7 mm (2.27 in)
- Energy range: 100 keV to 3 MeV
- Typical energy window: 314 - 414 keV (131I, E_γ 364.5 keV)
- 1024-channel spectrum
- Typical measurement range: 3.7 to $3.7 \cdot 10^{+6}$ Bq/m³ (10^{-10} to 10^{-4} µCi/cc)

ENVIRONMENTAL CHARACTERISTICS

- Normal temperature: +5 °C to +40 °C (+41 °F to +104 °F)
- Temperature limit: -5 °C to +55 °C (+23 °F to +131 °F)
- MTBF: > 20 000 hours, with preventive maintenance
- TID: 100 Gy (10^{+4} rad)

PNEUMATIC CHARACTERISTICS

- Standard flow rate: 35 l/min (1.24 scfm)
- Pressure drop: 100 to 350 mbar (1.45 to 5.07 psi)

MECHANICAL CHARACTERISTICS

- Dimensions: 1607 mm x 1370 mm x 1535 mm (63.2 in x 53.9 in x 60.4 in)
- Weight: 720 kg (1587 lb)
- Inlet tube connection: Ø 25.4 mm OD (1 in)
- Outlet tube connection: Ø 12 mm OD (1/2 in)

ELECTRICAL CHARACTERISTICS

- Power supply: refer to possible versions
- Data link outputs: one RS232 and five isolated RS485
- Alarm relays: six SPDT relays and five DPDT relays
- I/O: six isolated analog outputs and one isolated analog input (0/4-20 mA)

SIGNALING

- Graphic display: measurement, historical trend, status...
- Sound alarm: buzzer 90 dBA at 1 meter
- Visual alarm: three lights (red, yellow, green)

REFERENCE STANDARDS

- Nuclear: IEC 60761, IEC 61171, IEC 61172, IEC 61578
- Environmental: RG 1.97, IEC/IEEE 60780-323
- Seismic: IEC 60980, IEEE 344
- EMC: 2014/30/EU and 2014/35/EU, EPRI 102323, RG 1.180, IEC 61000-6-2 and IEC 61000-6-4

VERSIONS

- 230 Vac or 230 Vac + 400 Vac 3Ø or 120 Vac + 400 Vac 3Ø
- Solenoid check sources for ABPM 201 and IM 201 monitors
- PIS particulate and iodine samplers
- Gas grab sampler ports
- Second pump for redundancy

ACCESSORIES

- Local and remote display units
- Calibration tools
- Software: MASS2™, RAMVISION™, SIMS2™ applications...
- USB converters



MIRION
TECHNOLOGIES

Copyright © 2024 Mirion Technologies, Inc. or its affiliates. All rights reserved. Mirion, the Mirion logo, and other trade names of Mirion products listed herein are registered trademarks or trademarks of Mirion Technologies, Inc. or its affiliates in the United States and other countries. Third party trademarks mentioned are the property of their respective owners.