


# CAPRAC-t Wipe Test/Well Counter

## Well Counters

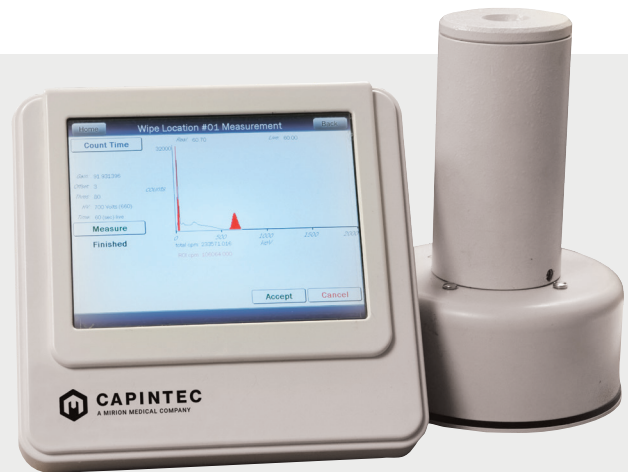

### Features

- 8 in SVGA touch screen color display
- 256 channel MCA with detailed spectrum for identification analysis
- NaI drilled-well crystal detector
- Automatic energy calibration, constancy check, and background subtraction
- Automated well QC including chi-square and MDA
- Manual and Automatic ROI
- Sets user-definable protocols for wipes
- Printouts of all data for permanent records with the optional printer
- Direct readouts with spectrum display are in cpm, dpm, curies and becquerels
- Meets all state and NRC wipe test requirements
- USB and RS-232 communication ports for PC and printer
- Compatible with nuclear medicine information management systems via USB
- Lab tests include Schilling, plasma and red blood cell (RBC) volume
- Built-in database for test and wipe results as well as QC

### Description

No need to worry about meeting the regulations in 10 CFR Part 35.315 (200 dpm requirements for unrestricted areas and iodine contamination). The Capintec™ CAPRAC-t Wipe-Test Counter handles all of them.

Measure for measure, no other well counter offers the speed, accuracy and complete range of built-in features provided by the compact CAPRAC-t counter. It performs a wipe test in just six seconds (for 1 nCi) and detects extremely low levels of activity with the accuracy only a NaI drilled-well detector can provide.

The CAPRAC-t system can also serve as a single-well gamma counter in departments that do not need multi-sample changers. User-defined protocols, trigger levels, and counting times are a “snap”. A 256-channel pulse-height analyzer permits built-in gamma spectroscopy. Definable conversion factors for specific radionuclides allow the CAPRAC-t counter to calculate results in cpm, dpm, nCi, cps, dps, or kBq. The CAPRAC-t unit also displays photon-energy histograms.


The CAPRAC-t counter is engineered and built for years of consistent, reliable performance and is curie or becquerel selectable. The unit has automatic background subtraction and self-diagnosis programs for systems testing with optimized signal-to-noise ratio. It includes a lead outer shield (1.3 cm thick) with optional auxiliary shield available.

# Capintec | CAPRAC-t Wipe Test/Well Counter

## Accessories



Cs-137 Rod Source  
Eu-152 Rod Source



Protective Screen Covers




Epson Roll Printer



Well Auxiliary Shield



Auxiliary Shield



Test Tubes

## Specifications

### Physical:

- **Console Dimensions:**
  - Height:** 42 cm (9.5 in.)
  - Width:** 23 cm (9.0 in.)
  - Depth:** 27 cm (10.5 in.)
  - Weight:** 3.4 kg (7.5 lb)
- **Chamber Dimensions:**
  - Height:** 23.8 cm (9.38 in)
  - Diameter:** 15.2 cm (6 in)
  - Weight:** 6.9 kg (15.2 lb)
  - Well Diameter:** 1.7 cm (.67 in.)
  - Well Depth:** 3.8 cm (1.5 in.)
  - Cable Length:** 2.7 m (9 ft)
- **Cables:**
  - Power:** 1.8 m (6 ft)
  - Printer<sup>1</sup>:** 1.8 m (6 ft)
- **Performance:**
  - Type:** Drilled-well crystal, NaI(Tl) scintillator
  - Crystal Dimensions:** 3.8 x 4.4 cm (1.5 x 1.75 in.)
  - Shielding:** 1.3 cm (0.5 in.) lead
  - Shielding:** 2.75 m (9 ft) interconnecting cable
  - Channels:** 256
  - Counting Rate:** 100,000 cps, max
- **Well Detector:**
  - Type:** 1 1/2 in Sodium Iodide (NaI) drilled-well crystal detector
  - 256 Channel MCA, manual and automatic ROI
  - Trigger Levels:** User-definable
  - Automated Calibration and Background Subtract
  - QC Tests:** Reproducibility, Chi-square, MDA

### • Display Screen:

**Type:** 8 in. VGA LCD color touch screen display

**Bq/Ci Reading:** User selectable or fixed

**Activity Display:** Selected radionuclide, efficiency, measured activity and display units (Bq/Ci)

**Count Rate Values:** Wipe and lab test results

### • Standard Source Data:

**System Memory:** Cs-137, Eu-152 standard sources  
Efficiency for commonly used isotopes

### • PC Port:

**Interface:** RS-232 and USB

**Compatibility:** Standard Nuclear Medicine Management Systems

### • Printer:

**Interface:** RS-232 and USB

### • Power Requirements:

100-240 V ac (50/60 Hz) 90 MA

### • Tests:

**Diagnostics:** Full test of program, system memories

### • Cable:

**Printer (Optional):** 1.8 m (6 ft)

**Power:** 1.8 m (6 ft)

## Ordering Information

5430-3136	CAPRAC-t Wipe Test/Well Counter
0975-137R	Cs-137 Rod Source
0975-152R	Eu-152 Rod Source
7900-0352	Protective Screen Covers
5430-0058	Epson Roll Printer
5420-2141	Well Auxiliary Shield
5420-2072	Auxiliary Shield
0670-0016	Test Tubes
9282-0009	Roll Paper
5420-0121	Well Liners

1: Longer cables are available. Consult factory.



Intertek

capintec.com

Mirion Technologies (Capintec), Inc. • 7 Vreeland Road, Florham Park, NJ 07932 USA

Copyright © 2024 Mirion Technologies, Inc. or its affiliates. All rights reserved. Mirion, the Mirion logo, and other trade names of Mirion products listed herein are registered trademarks or trademarks of Mirion Technologies, Inc. or its affiliates in the United States and other countries. Third party trademarks mentioned are the property of their respective owners.

SPC-417-B\_EN-CAP – 08/2024